



Fabric requirements



Fabric A: 4141805 #1
1-3/4 yards



Fabric B: 214-0001 White
1-1/2 yards



Fabric C: 4141808 #1
1/2 yard



Fabric D: 4141801 #1
1/2 yard



Fabric E (Binding): 4141803 #1
5/8 yard



Suggested Backing
4141807 #1
3-1/3 yards

Exclusive quilt design by Cheryl Brickey of Meadow Mist Designs for Camelot Fabrics
Fabric collection: Beach House by Jack!e McFee for Camelot Fabrics



Blog, Facebook, Twitter @CamelotFabrics
Pinterest, YouTube & Instagram @Camelot_Fabrics
camelotfabrics.com • camelotfabricsblog.com
Toll-Free: 1-800-361-4120 • 514-382-2400
info@camelotfabrics.com • www.camelotfabrics.com

Finished Quilt Size: 51" x 68"

OTHER TOOLS & SUPPLIES

- Rotary cutter & mat
- Sewing machine & coordinating thread
- Iron & pressing surface
- Pencil
- 2 yds quilt batting (58" wide)

Notes:

- WOF = width of fabric (42")
- Unless otherwise directed, sew all seams with a scant 1/4" seam allowance.
- Please wash, dry & iron your fabric before beginning, and trim selvages.

THE DESIGN

Cracker Lattice is a modern take on a classic quilt block, the cracker block. With a different block arrangement and coloration, a lattice pattern is created. The cracker block measures 9" x 9" (8-1/2" x 8-1/2" finished) and the finished quilt measures at 51" x 68".

CUTTING

Fabric A

Cut (16) 2-1/2" x WOF strips

Fabric B

Cut (8) 2-1/2" x WOF strips

Cut (6) 5-1/8" x WOF strips - Sub-cut (48) 5-1/8" x 5-1/8" squares (8 from each strip)
- Cut each square on the diagonal, for 96 triangles total

Fabric C

Cut (3) 5-1/8" x WOF strips - Sub-cut (24) 5-1/8" x 5-1/8" squares (8 from each strip)
- Cut each square on the diagonal, for 48 triangles total

Fabric D

Cut (3) 5-1/8" x WOF strips - Sub-cut (24) 5-1/8" x 5-1/8" squares (8 from each strip)
- Cut each square on the diagonal, for 48 triangles total

Fabric E - Binding


Cut (7) 2-1/2" x WOF strips.

BLOCK ASSEMBLY


1. Form (8) tri-layer strips, each using (2) Fabric A 2-1/2" x WOF strips sandwiching (1) Fabric B 2-1/2" x WOF strip. Press seams open.




2. Sub-cut each tri-layer strip into (6) tri-layer squares (6-1/2" x 6-1/2") for a total of (48) tri-layer squares.

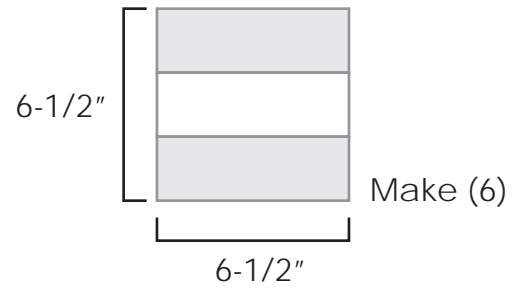



3. Center (1) Fabric B triangle on the Fabric A side of a tri-layer square. Sew along the edge with a scant 1/4" seam (shown as the dotted line).

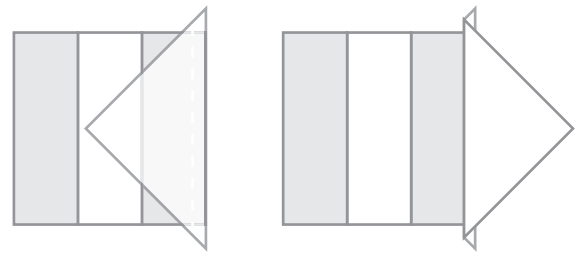

4. Sew a second Fabric B triangle onto the opposite side of the tri-layer square, and press both seam allowances away from the center square.

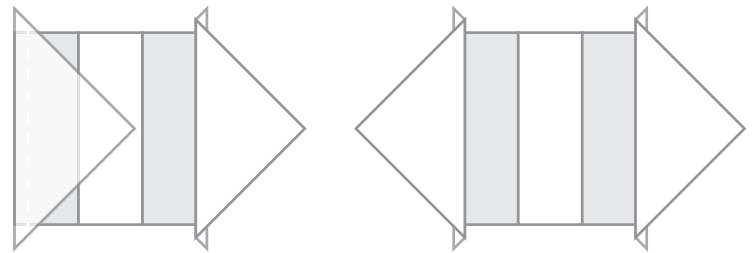


5. Continue by sewing a Fabric C triangle and a Fabric D triangle onto the tri-layer square, pressing the seams outward.

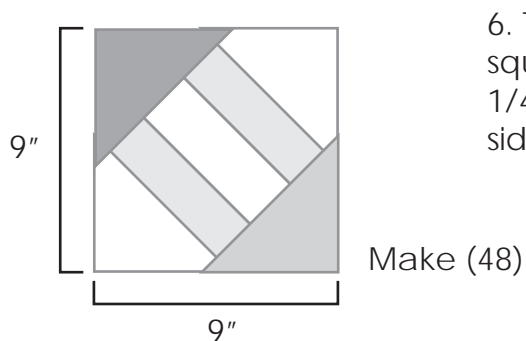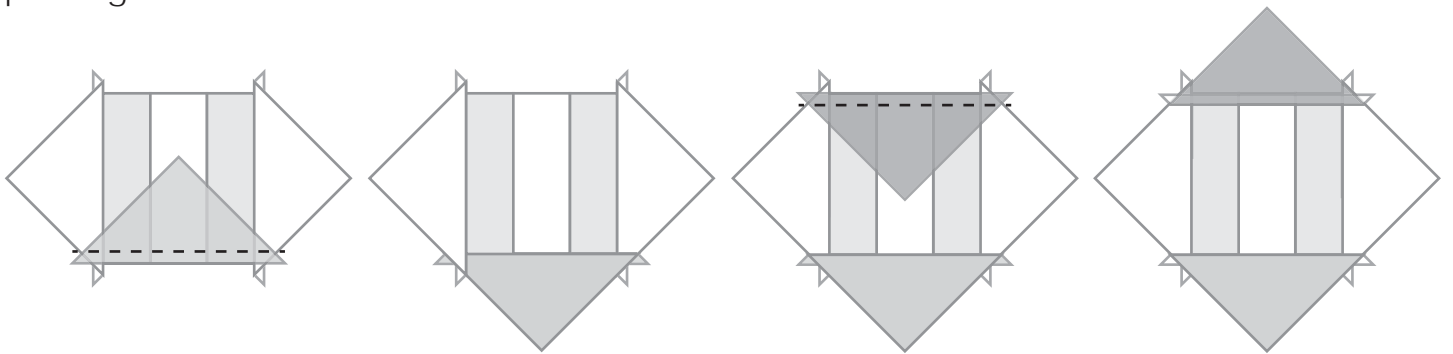

6. Trim off the tabs formed by the sewn-on triangles and square the block to 9" x 9" (if necessary) making sure there is 1/4" between the corner of the inner square and the outer side of the unit.

QUILT TOP ASSEMBLY

1. Lay out the (48) quilt blocks in (6) columns by (8) rows, turning each block to match the illustration below.
2. Sew the blocks together in rows. Press all seams open, or press alternating rows in opposite directions.
3. Sew the rows together to form the quilt top, and press the seams open.

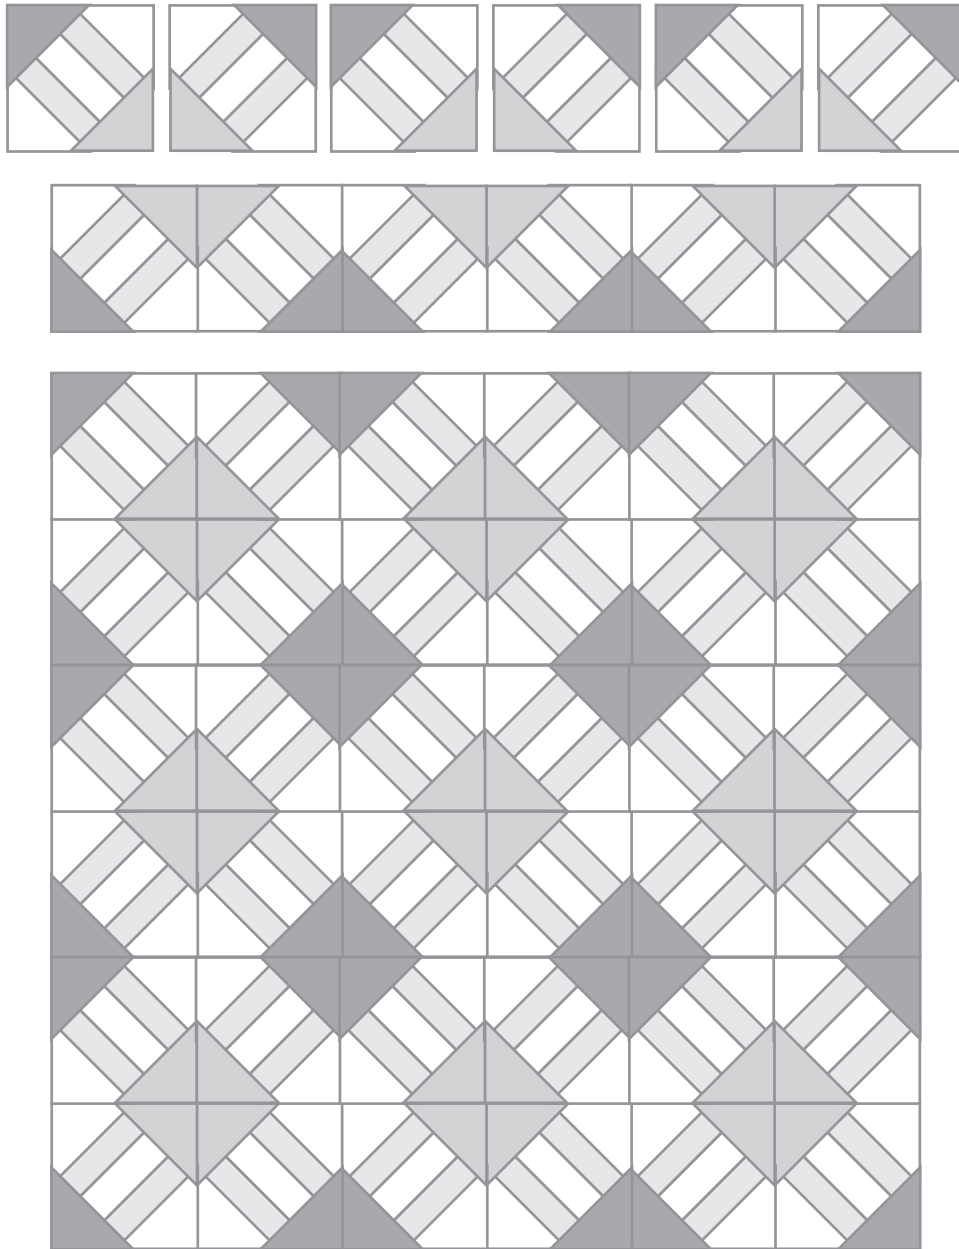

FINISHING THE QUILT

1. Join the backing fabric pieces along the trimmed selvage edges & press the seam open. Backing should measure approximately 60" x 84".
2. Layer the quilt top, batting & backing. Baste and quilt as desired.
3. Sew (7) 2-1/2" x WOF Fabric E strips end-to-end to make the binding. Bind as desired and enjoy your quilt!

