



Whimsical Quilt (Q-004C)



Exclusive Quilt Design by Larene Smith of The Quilted Button for Camelot Fabrics
Fabric collection: Disney Villains by Camelot Design Studio from Camelot Fabrics. © Disney
The direction of the fabrics in the digital imagery may not be accurate to the final product.

Fabric requirements



Fabric A
85130104 #2
1/4 yard



Fabric B
85130105 #3
1/2 yard



Fabric C
85130101 #2
1/3 yard



Fabric D
85130103 #2
1 yard
(includes binding)



Fabric E
214-0042 Iron
1/4 yard



Fabric F
85130106 #3
1/4 yard



Fabric G
85130101 #1
1/4 yard



Fabric H
85130104 #1
1/2 yard



Fabric I
214-0017 Navy
1/4 yard



Fabric J
85130106 #1
1/2 yard



Fabric K
85130105 #2
2-1/4 yards




Fabric L
2144-0042
1/4 yard




Fabric M
85130103 #3
1/3 yard



Fabric N
85130104 #3
1/2 yard



Fabric O
214-0019 Amethyst
1/4 yard



Fabric P (Sashing)
214-0001 White
1-1/3 yards



Backing:
85130103 #2
3-5/8 yards

Finished Quilt Size: 56" x 71"



Blog, Facebook, Twitter @CamelotFabrics
Pinterest, YouTube & Instagram @Camelot_Fabrics
camelotfabrics.com • camelotfabricsblog.com
Toll-Free: 1-800-361-4120 • 514-382-2400
info@camelotfabrics.com • www.camelotfabrics.com

OTHER TOOLS & SUPPLIES

2-1/4 yds quilt batting (58" wide)

Rotary Cutter, Mat, Rulers (a 15-1/2" square ruler would be helpful), Straight Pins, Sewing machine, and threads to match your fabrics.

NOTES

For best results, read all directions before beginning.

Use an accurate 1/4" seam allowance for all sewing.

WOF = Width of Fabric.

Press all seams open unless directed, to decrease bulk.

Finished Block is 15" square.

Sashing is 1/2" finished.

To prevent confusion, group the pieces as you cut, according to their intended blocks.

CUTTING

Fabric A – Cut (1) strip at 7" x WOF

Sub-cut into (5) 7" x 4-1/2" rectangles

(Blocks F, H, I, J, K).

Fabric B – Cut (1) strip at 11-1/2" x WOF

Sub-cut into (5) 11-1/2" x 7" rectangles

(Blocks B, C, D, E, G).

Fabric C – Cut (2) strips at 4" x WOF

Sub-cut into (5) 4" x 11-1/2" rectangles

(Blocks F, H, I, J, K).

Fabric D – Cut (1) strip at 15-1/2" x WOF

Sub-cut into (5) 15-1/2" x 4" rectangles

(Blocks F, H, I, J, K).

Cut (7) 2-1/2" x WOF strips for Binding.

Fabric E – Cut (1) strip at 4-1/2" x WOF

Sub-cut into (2) 4-1/2" squares

(Blocks A and L).

Fabric F – Cut (1) strip at 7" x WOF

Sub-cut into (5) 7" x 4-1/2" rectangles

(Blocks B, C, D, E, G).

Fabric G – Cut (1) strip at 4" x WOF

Sub-cut into (2) 4" x 11-1/2" rectangles

(Blocks A and L).

Fabric H – Cut (1) strip at 15-1/2" x WOF

Sub-cut into (2) 15-1/2" x 4" rectangles

(Blocks A and L).

Fabric I – Cut (1) strip at 4-1/2" x WOF

Sub-cut into (5) 4-1/2" squares

(Blocks F, H, I, J, K).

Fabric J – Cut (1) 7" x WOF strip -
sub-cut (2) 11-1/2" x 7" rectangles
(Blocks A and L).

Fabric K - Cut as follows:

a. Cut (3) strips at 4" x WOF. Join
end-to-end, then sub-cut into
(2) 4" x 56" rectangles
(Top/Bottom Outer Border).

b. Cut (2) strips at 4-1/4" x 64" along the
selvage
(Sides Outer Border).

c. From the balance of the fabric cut (5)
7" x 11-1/2" rectangles
(Blocks F, H, I, J, K).

Fabric L – Cut (1) strip at 7" x WOF

Sub-cut into (2) 7" x 4-1/2" rectangles

(Blocks A and L).

Fabric M – Cut (2) strips at 4" x WOF

Sub-cut into (5) 4" x 11-1/2" rectangles

(Blocks B, C, D, E, G).

Fabric N – Cut (1) strip at 15-1/2" x WOF

Sub-cut into (5) 15-1/2" x 4" rectangles

(Blocks B, C, D, E, G).

Fabric O – Cut (1) strip at 4-1/2" x WOF

Sub-cut into (5) 4-1/2" squares

(Blocks B, C, D, E, G).



Fabric P (Sashing)

Sashing within Blocks:

- Cut (1) strip at 15-1/2" x WOF – Sub-cut into (12) 15-1/2" x 1" rectangles.
- From the balance of the fabric cut (24) 11-1/2" x 1" rectangles and (12) 4-1/2" x 1" rectangles.

Sashing between Blocks:


- Cut (4) strips at 1" x WOF – Sub-cut into (8) 1" x 15-1/2" rectangles (Vertical Sashing between Blocks).
- Cut (5) strips at 1" x WOF and join end-to-end, then sub-cut into (3) 1" x 46-1/2" rectangles (Horizontal Sashing between Blocks).

Inner Borders:


- Cut (6) strips at 1-1/2" x WOF and join end-to-end, then sub-cut into (2) 1-1/2" x 62" rectangles (Sides Inner Border) and (2) 1-1/2" x 48-1/2" rectangles (Top/Bottom Inner Border).

SEWING THE BLOCKS


Note: The same method is used for sewing each block, except that Blocks B, D, F, H, J & L are sewn with the fabrics' patterns "upside down" as these blocks will be rotated 180° in the quilt's final assembly. Use the Cover image and the Block Layout on page 6 as guides, and sew (1) block at a time.




1. Sew (1) Sashing 1" x 4-1/2" rectangle to the Bottom of (1) 4-1/2" x 7" rectangle. Add (1) 4-1/2" square below the Sashing.

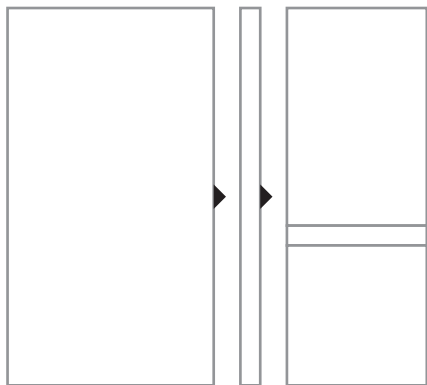


2. Sew (1) Sashing 1" x 11-1/2" rectangle and (1) 7" x 11-1/2" rectangle to the Left of this unit to measure 11-1/2" square.

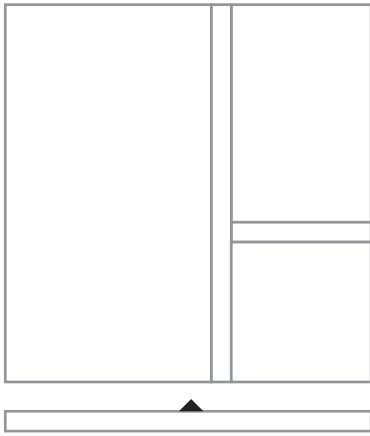


3. Sew (1) 1" x 11-1/2" Sashing rectangle to the Bottom of this square.

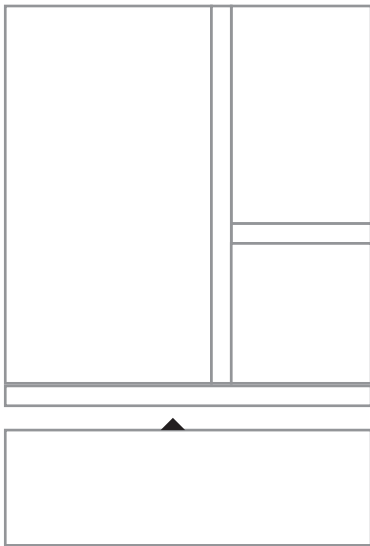

4. Sew (1) 4" x 11-1/2" rectangle to the Bottom of the Sashing just sewn to measure 11-1/2" x 15-1/2".

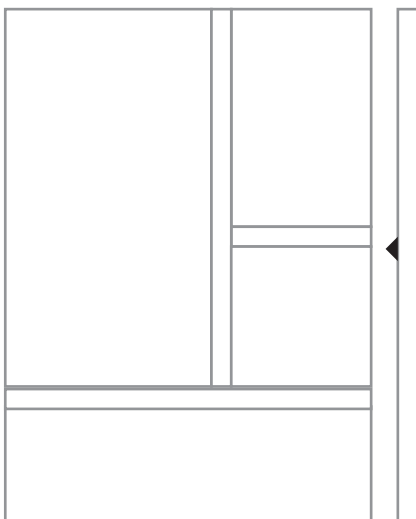

5. Sew (1) 1" x 15-1/2" Sashing rectangle to the Right side of this composite rectangle.

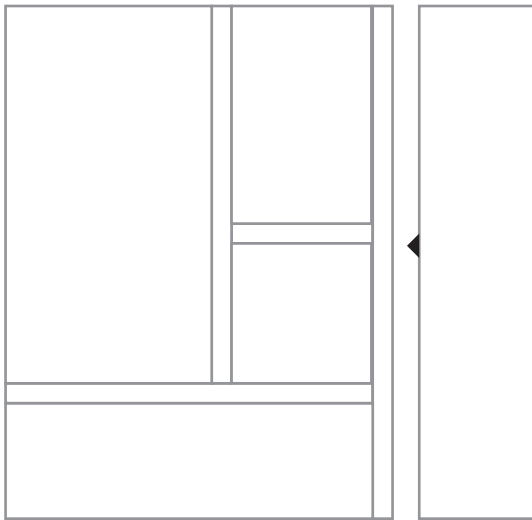


6. Sew (1) 4" x 15-1/2" rectangle to the Sashing just sewn to finish at 15-1/2" square.

This completes Block A; all other blocks are sewn in the same manner, using different fabrics as indicated in the Block Layout diagram. Remember to pay special attention to the blocks' orientation!

QUILT CENTER

Row 1 – Block A, Fabric R 1" x 15-1/2" Vertical Sashing, Block B, Fabric R 1" x 15-1/2" Vertical Sashing, Block C to measure 46-1/2" x 15-1/2".












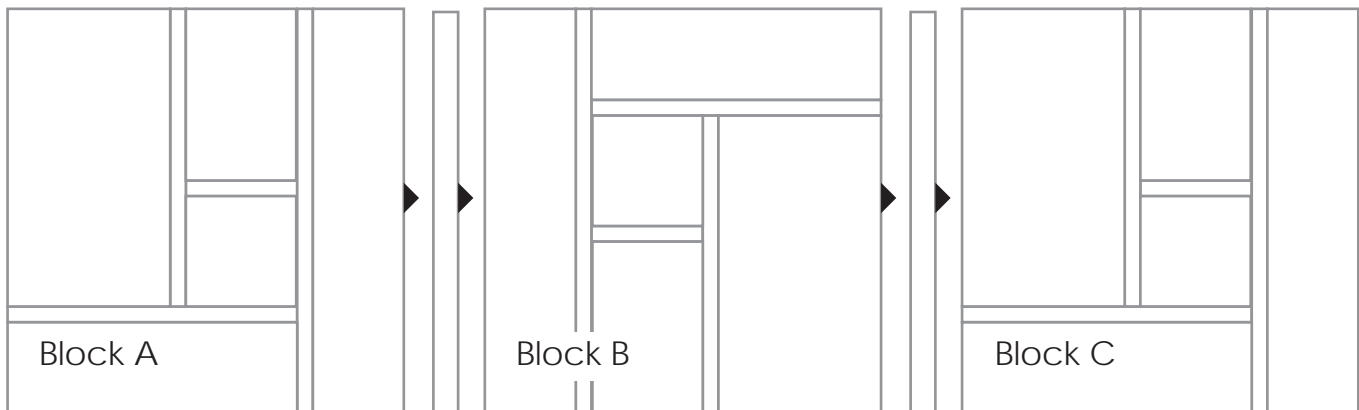


Rows 2, 3, and 4 are prepared exactly the same as Row 1, except that they use the remaining blocks as shown in the Block Layout.

Sew the rows together by inserting a Horizontal Sashing strip (1" x 46-1/2") between each row to finish the quilt center at 46-1/2" x 62".

BLOCK LAYOUT

Note - Grey letters indicate which fabric is used in each piece.

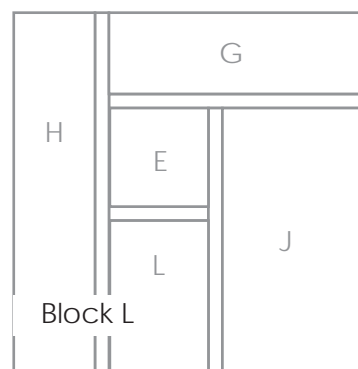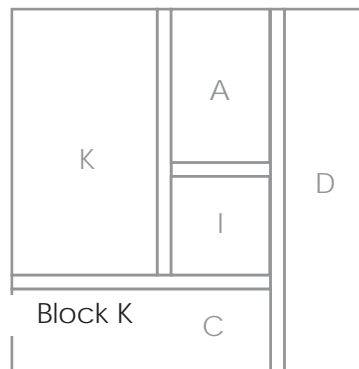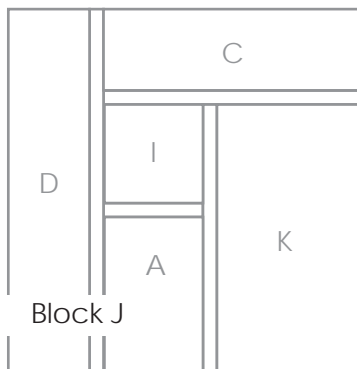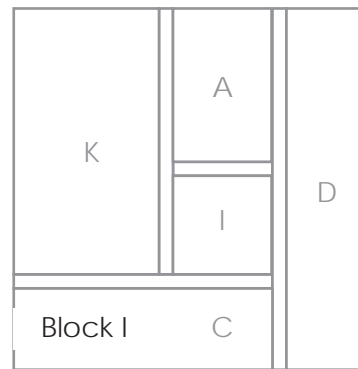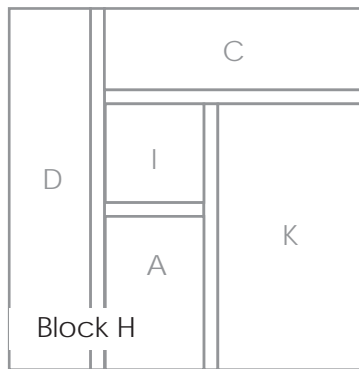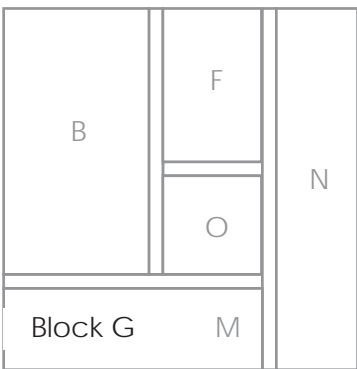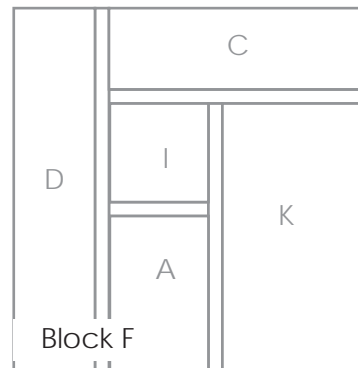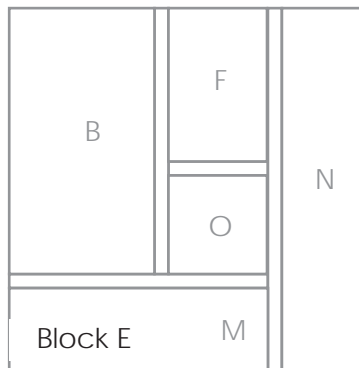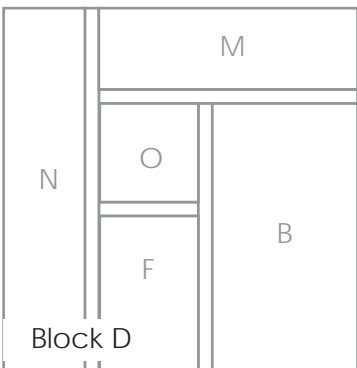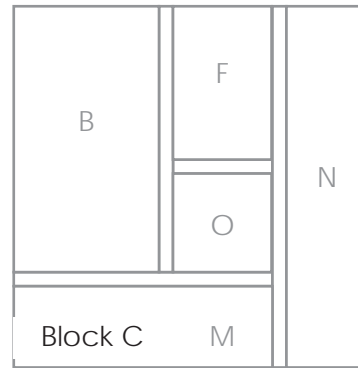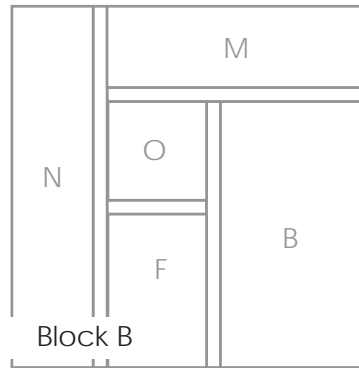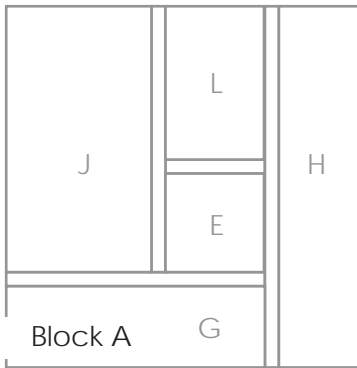

BORDERS

1. Sew (1) Fabric P 1-1/2" x 62" Inner Border to each side, then sew (1) Fabric P 1-1/2" x 48-1/2" Inner Border each to the Top and Bottom to measure 48-1/2" x 64".
2. Sew (1) Fabric K 4-1/4" x 64" Outer Border to each side, then sew (1) Fabric K 4" x 56" Outer Border each to the Top and Bottom to finish the quilt top at 56" x 71".

FINISHING

1. Layer the backing, batting, and quilt top and quilt as desired.
2. Bind the quilt with Fabric J strips joined end-to-end.

